

Stainless Steel Bolting Cloth

Technical Info


Screening/Sieving

Mesh Type	Metric	Unit		
Aperture	0.67 mm			
Wire Diameter	0.16	mm		
Mesh Type	Nearest Imperial			
Mesh	30 (31)			
SWG	38			
Mesh properties	Technical	Unit		
Open area	65	%		
Weave type	Plain Weave - Square Mesh			

Standards / Testing

ASTM E2016-15 Standards for woven wire mesh

Non-destructive alloy analysis, PMI Inspections, and QA/QC testing available upon request

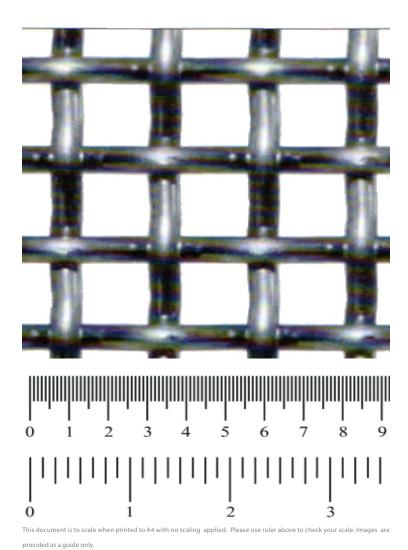

Droduct Dongo

Product Range						
Part-Number	Material Grade	Width mm	Length m	Diameter mm	Weight kg / m	
BC0670-1220	316	1220	30	0.16	0.48	



FABRICATED ITEMS

Australia: Sefar Pty Ltd

Phone 1300 306 661 oceaniasales@sefar.com New Zealand: Sefar Filter Specialists Ltd Phone +64 9 527 4409 salesnz@sefar.com

SCREENING MESH

www.metalmesh.com.au

EXTRUDER DISCS

Article Group BC0670-1220